

BCP1006-CPVC Fittings-Reducer

1.0 Description

Available Size

- DN25mm-100mm | ½"-4"

Working pressure

- PN16

Material

- CPVC

Standard

- ASTM F441

Color

- Gray color or other color upon request


Features

- Resistant to compression,
- UV light, weather, chemicals



2.0 Technical Data

2.1 Special Design

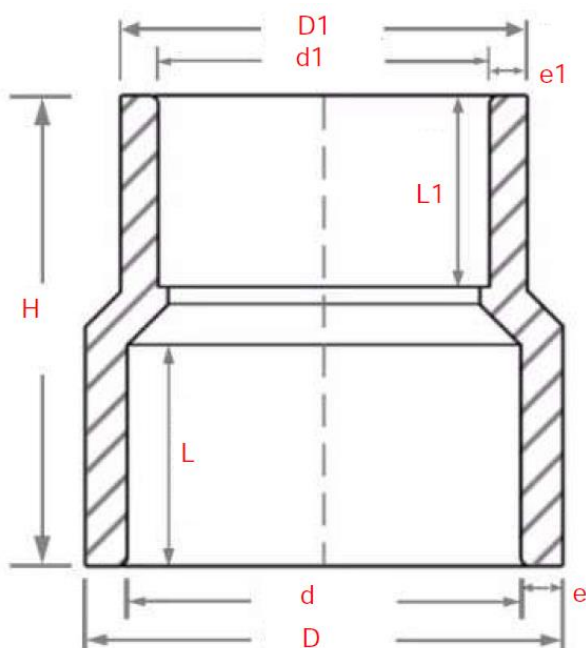

BCP1006-CPVC Fittings-Reducer

2.2 Technical Data

No	Size	D/mm	d/mm	e/mm	L/mm	H/mm	D1/mm	d1/mm	e1/mm	L1/mm
1	3/4"X1/2"	36.77	26.7	5.03	26.32	54.52	30.27	21.4	4.58	23.21
2	1"X1/2"	42.58	33.45	4.58	28.9	61.63	28.99	21.41	4	22.71
3	1"X3/4"	42.66	33.43	4.97	28.93	62.1	34.77	26.78	4.11	25.91
4	1 1/4"X1/2"	51.98	42.24	4.94	32.21	68.54	29.16	21.43	3.95	22.71
5	1 1/4"X3/4"	52.01	42.11	5	32.15	68.13	34.65	26.48	4.03	25.78
6	1 1/4"X1"	51.95	42.24	4.95	32.17	68.25	42.75	33.43	4.66	28.85
6	1 1/2"X1/2"	58.58	48.26	5.26	35.48	73.96	29.02	21.4	3.94	22.76
8	1 1/2"X3/4"	58.87	48.33	5.21	35.33	74.04	34.71	26.73	4.15	25.82
9	1 1/2"X1"	58.8	48.27	5.18	35.12	74.05	42.82	33.52	4.76	28.97
10	1 1/2"X1 1/4"	58.86	48.28	5.27	35.48	74.07	52.13	42.32	5.07	32.15
11	2"X 1/2"	71.8	60.3	5.57	38.53	75.63	29	21.33	3.89	22.67
12	2"X 3/4"	71.78	60.32	5.65	38.59	75.59	34.68	26.72	4.02	25.84
13	2"X 1"	71.83	60.41	5.75	38.7	75.99	42.83	33.4	4.7	29.04
14	2"X 1 1/4"	71.9	60.47	5.73	38.7	82	52.24	42.37	4.97	32.17
15	2"X 1 1/2"	71.86	60.4	5.6	38.6	82.55	58.73	48.14	5.33	35.29
16	2 1/2"X 1 1/2"	87.59	73.11	7.1	45.09	92.7	59	48.49	5.24	34.99
17	2 1/2"X 2"	87.6	73.19	7.15	44.76	92.26	72.04	60.31	5.76	38.18
18	3"X 1 1/2"	104.54	88.95	7.71	47.83	101.79	58.95	48.26	5.28	35.23
19	3"X 2"	104.6	88.92	7.62	47.86	101.95	72.21	60.51	5.7	38.03
20	3"X 2 1/2"	104.53	89.04	7.67	47.97	102.16	87.52	73.11	7.06	44.38
21	4"X 1 1/2"	131.81	114.34	8.74	57.88	105.25	59.15	48.5	5.3	35.25
22	4"X 2"	132.21	114.39	8.84	58.17	120.59	73.27	60.34	6.39	39.05
23	4"X 2 1/2"	131.76	114.31	8.46	57.63	116.56	87.62	73.04	7.24	44.89